

User manual

Wet Marking Cart Typ 702

Attention!

Damages which occur as a result of disregard for these operating instructions are not covered by the product guarantee!

Liability for any and all consequential damage is excluded!

Nor do we assume liability for damages to property or personal injury caused by improper use or the failure to observe safety instructions!

The warranty is voided in these cases!


Safety Instructions for Wet Marking Cart, Typ 702

- This product was developed for carpet marking with environmental harmless marking color (no calcium carbonate and colors with thinner).
Recommendation to use only special carpet colors!
- The unauthorized conversion or/and modification of the product is inadmissible of safety and approval reasons.
- Only trained/experienced operator usage allowed!
The product should be kept out of the reach of children under 18 years of life!
- The operator has to take care about the working Marking Cart.
He is responsible to keep the security distance to persons and objects while marking.
- Follow the guidelines of the relevant Accident Prevention & Insurance Associations
- Keep the operation guideline and safety instructions at the Marking Cart.
- Do not carelessly leave the packaging material lying around as this may become a dangerous toy for children.
- Do an inspection of the Pressure Safety relieve valve before operation
- Do not abuse this device for other needs!



Stand 10/2015

TYPE 702

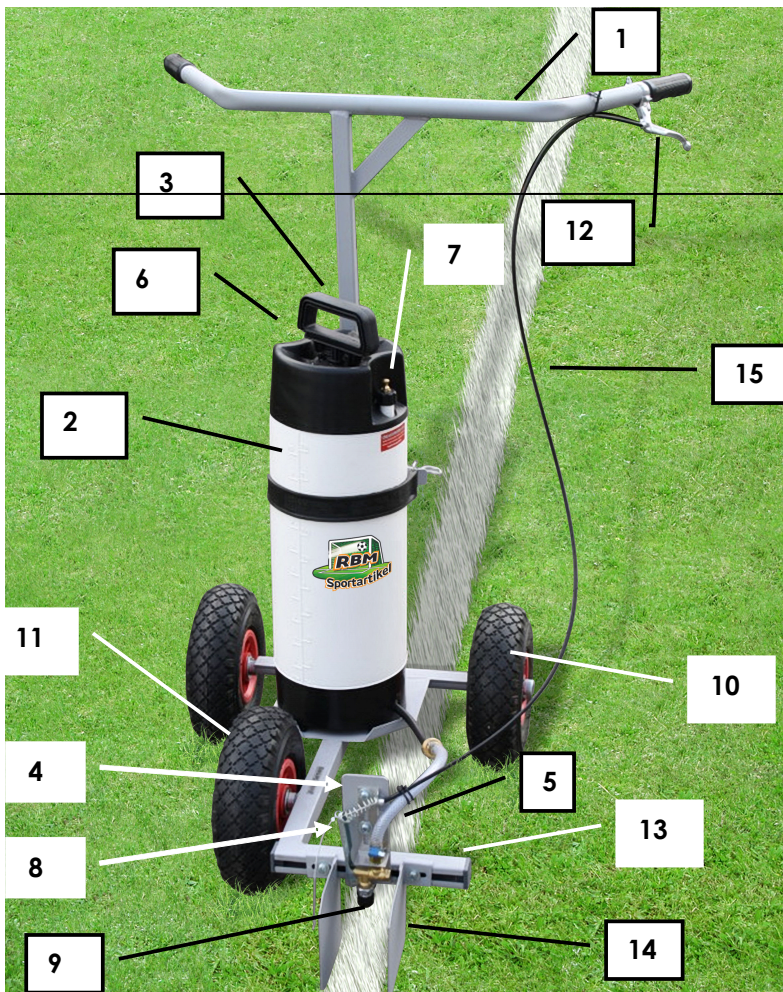


1. Guide bar with rubber-seized
2. Plastic-Pressure-Tank
3. Plastic-Handpump
4. Mounting plate f. Rapid-Action-Valve
5. Pressure hose
6. Manometer
7. Relief valve
8. Rapid-Action-Valve
9. Spray unit complete
10. Running-Gear
11. Leading-Gear
12. Lever
13. Device Frame
14. Lining plate
15. rope to pull with cover

Operating and servicing wet marking carts

1. When unpacking, ensure that all parts are removed from the cardboard box.
2. Attach the guide bar to the device frame and screw together.
3. Place the plastic pressure tanks on the intended stabling sheet and connect the pressure tubes. The device is now operational.
4. Unscrew hand pump and fill with the finished mixed paint using a funnel, as required (max. 8.5 litres).
5. Using the hand pump, inflate tanks up to approx. 2.2 bar and check the safety valve function to prevent over-pressure!
6. The marking cart is now ready for marking. With lawns that are to be mowed at either short or long lengths, please ensure the paint nozzle and/or the rapid-action valve is adjusted to the appropriate height.
7. After marking, fill the empty containers with some water, re-pressurize and flush the pressure tube with the rapid-action valve and nozzle. Afterwards, unscrew the paint nozzle and the safety-valve and leave it in a small container of water until it is to re-used; this prevents clogging of the small nozzle bore.
8. The marking paints are supplied in 15 kg containers. Please observe the mixing ratio indicated on the paint bucket.

Ersatzteilliste Typ 701/702/704

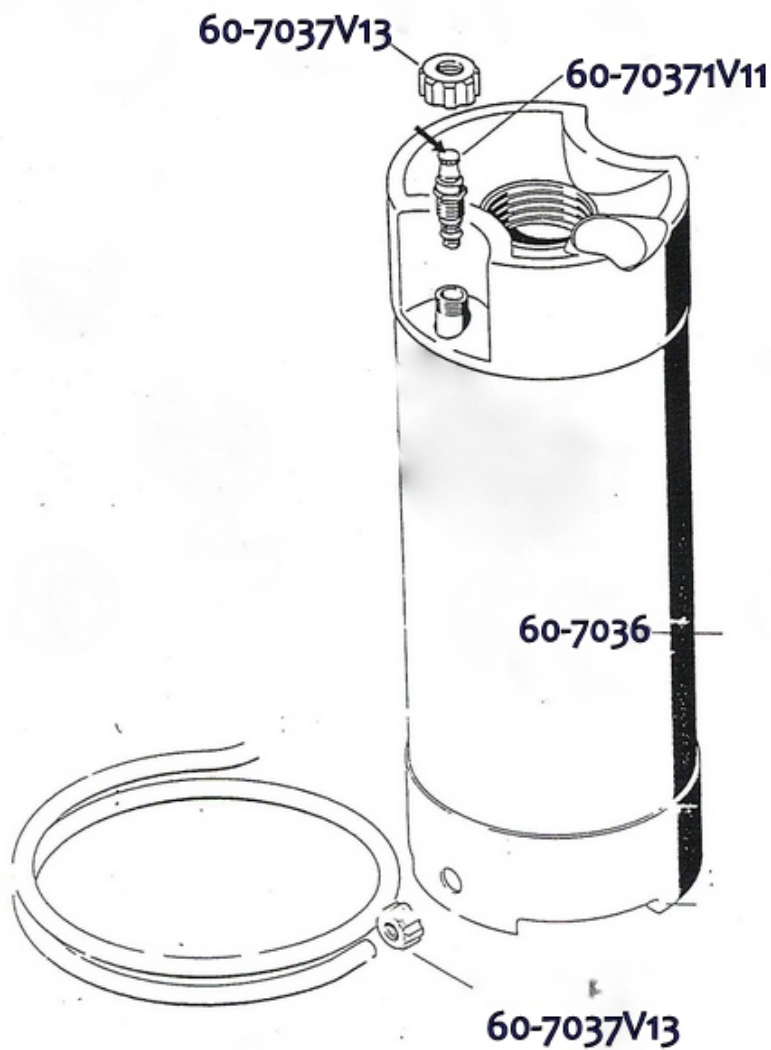

Komplette Handpumpe 60-7037

